

# EPSON®

EXCEED YOUR VISION


## Epson EMP 260/280

### Reliable, high-quality presenting in tough, dusty environments

Enjoy long-lasting presenting power even in difficult conditions with the 'dust-proof' Epson EMP-260 and Epson EMP-280. These high-quality, affordable projectors are built to keep on giving bright, clear performances even in sandy or dusty conditions.

#### Sealed, dust-resistant and reliable

Make bright, clear and colourful presentations even in tough conditions. The projector case is a sealed unit, with a glass lens cover and a high efficiency electrostatic filter that captures even the smallest dust particles.




High efficiency filter



Glass lens cover

#### Clean the filter in seconds

The exclusive filter is easy to clean. When you see the cleaning notification message on the screen, simply remove the filter, tap it against a desk or give it a quick vacuum, then put it back in. You're ready to start presenting again.



Notification message




Remove filter



Tap to clean

#### Ideal for ceiling-mounted installation

Connect to the room power and turn the projector on and off instantly with Direct Power On/Off. The easy access lamp is quick to change, while the metal security bar, Kensington lock hole and password protection add security.



Direct On / Direct Off



Easy lamp access




Ceiling mounted security



#### Save time, money and energy

Brighter images need less power with the Epson E-TORL lamp. Save time and money with simple, less frequent lamp and filter changing. Never waste energy – the adjustable sleep function turns the projector off automatically.

### E-TORL



Model	Epson EMP-280	Epson EMP-260
<b>Projection system (3LCD)</b>	0.63-inch with MLA (x3) TFT	0.55-inch without MLA (x3) TFT
<b>Native resolution</b>	XGA (1024x768)	SVGA (800x600)
<b>Resolution supported</b>	VGA ~ UXGA	VGA ~ SXGA+
<b>Brightness</b>		
High/Low brightness mode	2600 ANSI lm/2080 ANSI lm	2000 ANSI lm/1600 ANSI lm
<b>Projection lens</b>		
F Number	1.60-1.74	1.44
Focal length	18.4 mm-22.12 mm	16.6 mm
Focus/Zoom type	Manual Focus/Manual Optical Zoom 1-1.2	Manual Focus/Digital Zoom 1-1.35
Lens protection	Glass cover	Glass cover
<b>Lamp</b>		
Type	170W UHE (E-TORL)	170W UHE (E-TORL)
Life (Low/High brightness mode)	4000 hours/3000 hours	4000 hours/3000 hours
<b>Filter type</b>	High efficiency cleanable	High efficiency cleanable
<b>Colour reproduction</b>	Full-Colour (16.77 million colours)	Full-Colour (16.77 million colours)
<b>Fan noise</b>		
Low/High brightness mode	31 dB/38 dB	31 dB/38 dB
<b>Contrast</b>	400:1	400:1
<b>Screen size (Projection distance)</b>		
Input	30 to 300 inch (0.84 to 10.42m)	30 to 300 inch (0.87 to 8.97m)
<b>Computer</b>		
Video	2xD-sub 15-pin	1xD-sub 15-pin
Audio	2xComponent (shared), 1xRCA, 1xS-Video	1xComponent (shared), 1xRCA, 1xS-Video
<b>Output</b>		
Computer	1xD-sub 15-pin	-
<b>Built-in speaker</b>	5 W monaural	1 W monaural
<b>Control</b>	RS-232C	1xUSB Type B
<b>Keystone correction</b>	Vertical: -30 to +30 degrees	Vertical: -30 to +30 degrees
<b>Direct Power On/Off</b>	Yes	Yes
<b>Security</b>	Security bar/Kensington Lock hole	Security bar/Kensington Lock hole
<b>Other functions</b>	Source Search, Auto Detection of RGB, Operation Panel Protected Function, Password Protected Function, 7 Colour Modes, High Altitude Mode, User logo, Freeze, A/V Mute, E-Zoom, Help	Source Search, Auto Detection of RGB, Operation Panel Protected Function, Password Protected Function, 7 Colour Modes, High Altitude Mode, User logo, Freeze, A/V Mute, E-Zoom, Help
<b>Operating temperature/altitude</b>	5°C to 35°C/0 to 2,286m	5°C to 35°C/0 to 3,000m
<b>Power supply wattage</b>	100 – 240 V AC ±10%, 50/60 Hz	100 – 240 V AC ±10%, 50/60 Hz
<b>Power consumption (220/240 V area)</b>		
Weight	235W	235W
<b>Dimension (DxWxH)</b>	3.6 kg	3.5 kg
<b>On-screen menu</b>	263x400x111 mm (Excluding Feet)	263x400x111 mm (Excluding Feet)
	24 languages (English / French / German / Italian / Spanish / Portuguese / Russian / Swedish / Norwegian / Finnish / Danish / Dutch / Hungarian / Czech / Polish / Slovenian / Romanian / Turkish / Greek / Arabic / Japanese / Simplified Chinese / Traditional Chinese / Korean)	24 languages (English / French / German / Italian / Spanish / Portuguese / Russian / Swedish / Norwegian / Finnish / Danish / Dutch / Hungarian / Czech / Polish / Slovenian / Romanian / Turkish / Greek / Arabic / Japanese / Simplified Chinese / Traditional Chinese / Korean)
<b>Supplied accessories</b>		
Power cable	3m	3m
Computer cable	1.8 m D-sub 15pin (Male) – D-sub 15pin(Male)	1.8 m D-sub 15pin (Male) – D-sub 15pin(Male)
<b>Remote control</b>	With 2xAA type alkaline batteries	With 2xAA type alkaline batteries
<b>Password protect sticker</b>	Included	Included
<b>User manual</b>	Included	Included
<b>Warranty</b>	3 years	3 years

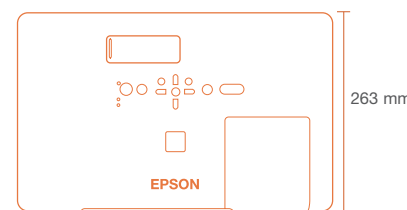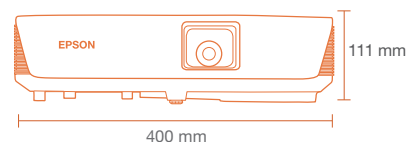

Epson EMP-280



Epson EMP-260



Remote control  
Epson EMP-280



Remote control  
Epson EMP-260

Projection distance							
Epson EMP-280				Epson EMP-260			
4:3 Screen size	Shortest (Wide)	Longest (Tele)	Vertical distance from centre of lens to bottom edge of screen	Shortest (Wide)	Longest (Tele)	Vertical distance from centre of lens to bottom edge of screen	
screen size / dimension	cm / inch		cm / inch	cm / inch		cm / inch	
30" / 61 cm x 46 cm 24.0" x 18.1"	84 / 33	101 / 40	5 / 1.9	87 / 34	119 / 47	4 / 1.7	
40" / 81 cm x 61 cm 31.9" x 24.0"	113 / 44	136 / 53	6 / 2.5	117 / 46	159 / 63	6 / 2.3	
60" / 120 cm x 90 cm 47.2" x 35.4"	171 / 67	206 / 81	10 / 3.8	177 / 70	240 / 95	9 / 3.4	
80" / 160 cm x 120 cm 63.0" x 47.2"	229 / 90	275 / 108	13 / 5.0	237 / 93	321 / 126	11 / 4.5	
100" / 200 cm x 150 cm 78.7" x 59.1"	287 / 113	345 / 136	16 / 6.3	297 / 117	402 / 158	14 / 5.7	
200" / 410 cm x 300 cm 161.4" x 118.1"	577 / 227	693 / 273	32 / 12.5	597 / 235	807 / 318	29 / 11.3	
300" / 610 cm x 460 cm 240.2" x 181.1"	867 / 341	1041 / 410	48 / 18.8	897 / 353	–	43 / 17.0	



For further information please contact your local Epson office or visit [www.epson-europe.com](http://www.epson-europe.com)  
Austria 0810/20 01 13 (0,07 €/Min.) Belgium 070/350120 (0.1735 €/min.) Czech 800/142 052  
Denmark 44 50 85 85 Finland 0201 552 091 France 0892 899 999 (0,34 €/min) Germany 01805/23 41 10 (0,14 €/Min.)  
Greece 210-8099499 Hungary 06800 147 83 Ireland 1 800 409132 Italy 02-660321 10 (0,12 €/min.) Luxembourg  
900/43010 (0,24 €/min.) Middle East +9714 8818934 Netherlands 0900-5050808 (0,05 €/oproep + 0,15 €/min.)  
Norway 22 06 42 80 Poland 0-0-800 4911299 (0,16 zł/min.) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia  
0850 111 429 South Africa (+2711) 465-9621 Spain 93 582 15 00 Sweden 0771-400135 (Mobilsamtal – 0,99 kr/min,  
Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) Switzerland 0848 448820 (4-8 cent./min.)  
Turkey (0212) 3360303 United Kingdom 0870 416900

Entity carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV

EPSON® is a registered trademark of Seiko EPSON® Corporation. All other product names and other company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.

**EPSON®**